




ChillCore Series 70" Dipping Cabinet Display Freezer, 2 Doors with Sneeze Guard
(Model: CCDCDF70)

★★★★★ (4.7/5)

Buy Now

WARRANTY
:
Compressor: 5 Years

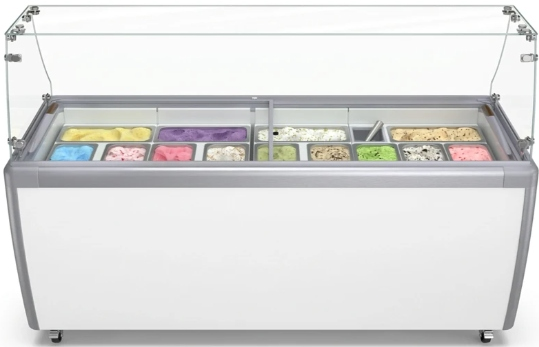

SPECIAL FEATURES

- ✓ **Pan Storage**
Holds 13 × 5L pans with a 6.5" pan depth, supporting organized frozen food handling in a commercial kitchen.

✓ **Glass Door Design**
Sliding glass doors with low-E tempered glass and sneeze guard support visibility and separation.

✓ **Lighting Visibility**
Dual side-mounted LED lighting with 190–700 lumen brightness supports display visibility in food service areas.
- ✓ **Temperature Range**
Operates between -15°F to 32°F with digital control for structured frozen storage in restaurant use.

✓ **Cooling System**
Static cooling with a bottom-mounted 0.67 HP compressor and R-290 refrigerant supports refrigeration operation.

✓ **Warranty & Certification**
ETL Listed and it includes a 2-year parts warranty and 5-year compressor warranty by the manufacturer.



PRODUCT OVERVIEW

The ChillCore Series Dipping Cabinet Display Freezer is a 70" unit designed for commercial kitchen operations handling ice cream, gelato, and frozen dessert display. It features powder-coated steel construction with a white finish and a pre-coated steel interior. The unit measures 70.86" (L) x 28.14" (W) x 52" (H), supporting freestanding installation with 6 casters.

This dipping cabinet freezer has a capacity of 20.1 cb3 with a 15.9 cu. ft. net capacity, supporting frozen storage. It includes 2 sliding glass doors with a sneeze guard made of low-E tempered glass, along with a door lock. The unit holds 13 × 5L pans with a pan depth of 6.5", and includes 13 pans and 1 plastic container for food handling.

The unit operates at 110 V, 1 phase, 60 Hz with a NEMA 5-15P plug and a 5.9 ft power cord. It uses R-290 refrigerant with a 0.67 HP bottom-mounted compressor. The temperature range of -15°F to 32°F is managed through digital control, with static cooling and manual defrost.

Additional features include dual side-mounted LED lighting with brightness ranging from 190 to 700 lumens for product visibility. The unit operates at 4 A and 372 W, with an energy consumption of 2237 kWh/year. It supports an ambient temperature range of 0°F to 100°F and requires 4" back and side clearance. The unit is ETL Listed and includes a 2-year parts warranty and 5-year compressor warranty by the manufacturer.

CERTIFICATIONS

ETL Listed

SPECIFICATION

ATTRIBUTE	VALUE	ATTRIBUTE	VALUE
Amps	4 ampere	Capacity	20.1 cubic feet
Color	White	Features	4" Back & Side Clearance Required, 15.9 cu. ft. Net Capacity
Phase	1 Phase	Plug Type	NEMA 5-15P
Power Cord Length	5.9 foot	Refrigerant Type	R-290
Temperature Range	-15°F to 32°F	Type	Dipping Cabinet Display Freezer
Voltage	110 volt	Hertz	60 hertz
Horsepower	0.67 horsepower	Country of Origin	China
Material	Powder-Coated Steel	Selling Unit	1/Each
Access Type	Doors	Lighting	LED Lighting, Dual Side-Mounted
Number of Casters	6 Casters	Interior Material	Pre-Coated Steel



SPECIFICATION

ATTRIBUTE	VALUE	ATTRIBUTE	VALUE
Installation Type	Freestanding	Product Weight	297 pound
Product Width	28.14 inch	Product Height	52 inch
Product length	70.86 inch	Interior Depth	21.2 inch
Interior Height	25.4 inch	Interior Width	65.1 inch
Number of Doors	2 Doors	Series	ChillCore Series
Defrost Type	Manual	Sneeze Guard Size	69.5 (D) x 21.2 (W) x 17.7 (H) in
Ambient Temperature Range	0°F to 100°F	Brightness	190-700 Lumen
Glass Type	Low-E and Tempered	Door Lock	Yes
Included	13 5L Pans, 1 Plastic Container	Energy Consumption	2237 kWh/year
Control Type	Digital	Wattage	372 watt
Compressor Location	Bottom Mounted	Casters	With Casters
Door Style	Sliding	Door Type	Glass Doors with Sneeze Guard
Cooling Type	Static Cooling	Pan Capacity	13 × 5L Pans
Pan Depth	6.5 inch		

ChillCore Series 70" Dipping Cabinet Display Freezer, 2 Doors with Sneeze Guard

Model: CCDCDF70



SALES & SUPPORT
 (866) 446-7322


[Chat on WhatsApp](#)

CONNECT WITH US
[f](#)
[y](#)
[in](#)
[ig](#)