

# HOT WATER DISPENSER

## HWD 2100 Series

### HWD 2105

Single Temperature



Whether you need a front of house self serve solution to prepare coffee, tea, oatmeal, and instant beverages, or back of house solutions that rely on hot water, the **HWD-2105** is the answer. The newly-designed hot water dispenser meets FETCO's exacting standards of innovation, reliability, durability and quality. It delivers form, function and flexibility like no other on the market today.



**High-resolution display** provides easy navigation and instant feedback. **Temperature settings** can be adjusted at the touch of a button using ergonomic capacitive touch function selector technology.



**Soft silicone tap** is designed to protect glass and ceramic serveware against damage.



**Convenient float indicator** is built into drip tray to help simplify maintenance and cleaning.



**SD card slot** allows operator to easily update software and maintain optimal performance.

**FETCO**  
DRIVEN TO INNOVATION



## Water Specification

|                                          |                                       |                                            |
|------------------------------------------|---------------------------------------|--------------------------------------------|
| Water Inlet<br>¼ inch male flare fitting | Minimum Flow Rate<br>1½ gpm [5.7 lpm] | Water Pressure<br>40-75 psig [276-517 kPa] |
|------------------------------------------|---------------------------------------|--------------------------------------------|



## Electrical Configuration

| Configuration Code           | Heater Configuration | Voltage | Phase | Wires | KW      | Electrical Connection    | Max Amp Draw | Gallon[Liter]/Hour                 |
|------------------------------|----------------------|---------|-------|-------|---------|--------------------------|--------------|------------------------------------|
| <b>DOMESTIC &amp; CANADA</b> |                      |         |       |       |         |                          |              |                                    |
| H210511                      | 1 x 1.44kW           | 120     | 1     | 2+G   | 1.5     | NEMA 5-15P               | 12.0         | 4.0 [15.0] <sup>(2)</sup>          |
| H210521                      | 1 x 2.1 kW           | 120     | 1     | 2+G   | 2.2     | NEMA 5-20P               | 17.5         | 5.7 [22.0] <sup>(2)</sup>          |
| H210531                      | 1 x 3.2 kW           | 200-240 | 1     | 2+G   | 2.3-3.3 | NEMA 6-15P               | 11.2-13.3    | 6.0-8.7 [22.7-33.0] <sup>(2)</sup> |
| <b>EXPORT</b>                |                      |         |       |       |         |                          |              |                                    |
| H210541                      | 1 x 3.2 kW           | 200-240 | 1     | 2+G   | 2.3-3.3 | Cord only <sup>(1)</sup> | 11.2-13.3    | 6.0-8.7 [22.7-33.0] <sup>(2)</sup> |



## Important

Temperature ranges selectable from 158°-203°F / 70°-95°C based on 207°F / 97°C hot water tank temperature.

(1) For EXPORT, cord without plug will be supplied.


(2) Five gallon per hour flow rate based on 65°-70°F / 18°-21°C water main supply temperature at lowest possible power supply current. Temperature displayed in F or C.




## Measurements

|                          |                         |                           |                                  |                                   |                                     |
|--------------------------|-------------------------|---------------------------|----------------------------------|-----------------------------------|-------------------------------------|
| Height<br>24½ in [62 cm] | Width<br>9 in [23.0 cm] | Depth<br>18½ in [47.0 cm] | Empty Weight<br>22 lbs [10.0 kg] | Filled Weight<br>49 lbs [22.0 kg] | Shipping Weight<br>33 lbs [15.0 kg] |
|--------------------------|-------------------------|---------------------------|----------------------------------|-----------------------------------|-------------------------------------|

### SIDE VIEW

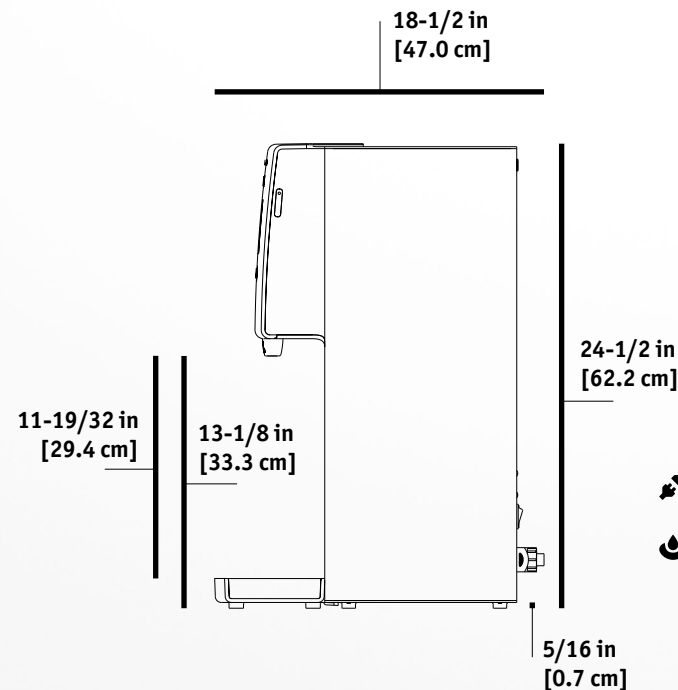


### BACK VIEW

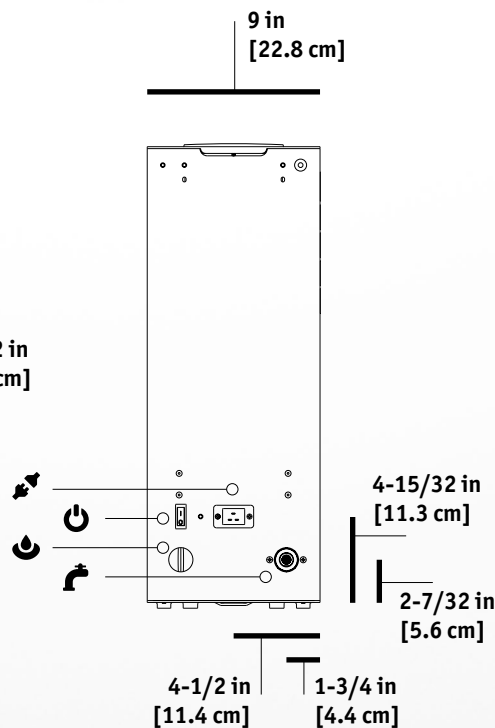

### SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet

### NEMA PLUGS CONFIGURATIONS



## Information



fetco.com



847.719.3000  
180.338.2699 USA



847.719.3001



Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA