

-SPECIFICATION-

Box Height: Freezer 12'-0" (11'-8" Interior)

Cooler 12'-0" (11'-8" Interior)

Insulation: 4" thick AK-XPS4 Extruded foam UL classified core
flame spread 15, Smoke rating less than 165

Compartment 1 - Freezer

D1 - (1) Standard 36" x 76" Left hinged flush door with brushed hardware. Interior & Exterior finish: 26 Ga. Stucco Embossed Acrylume. Energy saving temperature regulating thermostat heater wire and heated relief vent. Heavy duty deadbolt handle latch with 1/4 turn inside release. Digital LED Thermometer with pilot light switch. 1807 11w, Vapor Proof, 120V. LED fixture. 82 Lumens /watt Angled face . Requires 115vac. 2.2 amps.

Refrigeration:

- (1) 2 HP Bohn DOE Compliant Outdoor Condensing Unit, Model BCH0022LBBCZA0000, 208-230/1/60, MCA 21 Amps, Low Temperature, Scroll, Air-cooled, R-448A, 1 year compressor and parts warranty from date of shipment within Continental USA. (6472 Btu/hr @ -10°F room temperature and 95°F ambient)
- (1) Bohn DOE Compliant BEL0045BS6EEAB0200, 208-230/1/60, Low Profile Electric Defrost, 0.5 Fan Amps with 1-Speed EC Motor (Totally Enclosed) motor
- (1) Extended 4 year compressor Warranty


Wall Panels

Interior Finish: 26 Ga. Stucco Embossed Acrylume

Exterior Finish: 26 Ga. Stucco Embossed Acrylume

Ceiling Panels

Interior Finish: 26 Ga. Stucco Embossed Acrylume

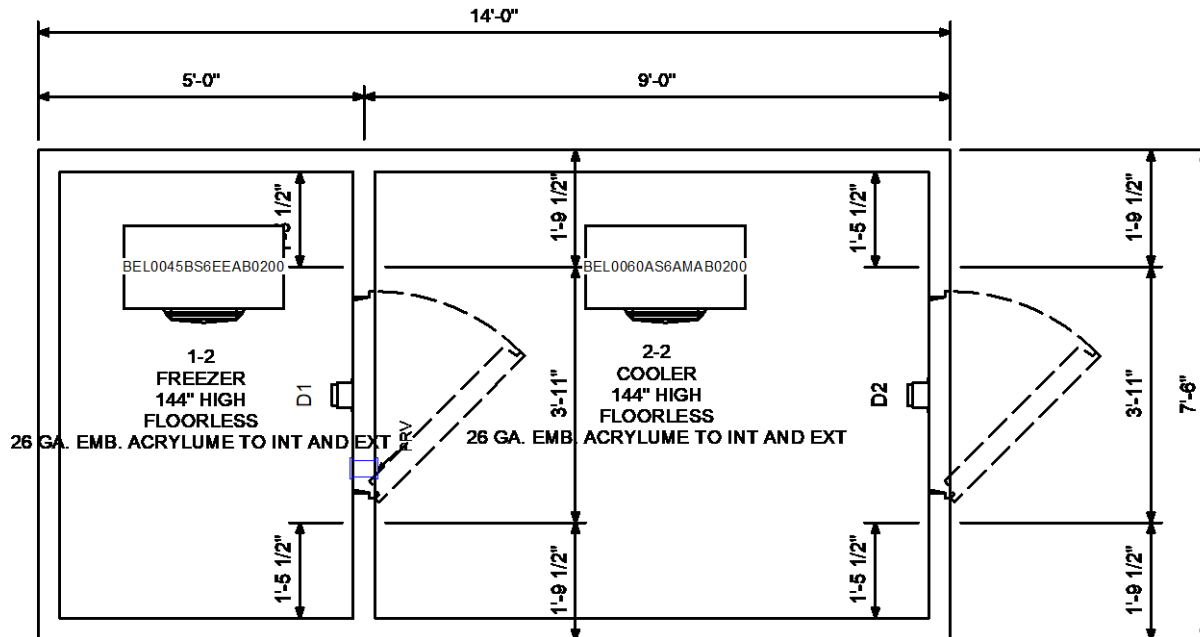

Customer Approval:

Quote #: 26-10367 Revision: 1

Project: Item 1 Combo

Date: 04/08/2026

Customer:Horeca

Page 1 of 3



-SPECIFICATION-Continued

Exterior Finish: 26 Ga. Stucco Embossed Acrylume

Compartment 2 - Cooler

D2 - (1) Standard 36" x 76" Left hinged flush door with brushed hardware. Interior & Exterior finish: 26 Ga. Stucco Embossed Acrylume. Heavy duty deadbolt handle latch with 1/4 turn inside release. Digital LED Thermometer with pilot light switch. 1807 11w, Vapor Proof, 120V. LED fixture. 82 Lumens /watt Angled face . Requires 115vac. 1 amps.

Refrigeration:

- (1) 0.75 HP Bohn DOE Compliant Outdoor Condensing Unit, Model BCH0009MBACZA0000, 208-230/1/60, MCA 15 Amps, BTUH 9570, Medium Temperature, Scroll, Air-cooled, R-448A, This refrigeration system is designed and certified for use in walk-in cooler applications -
- (1) Bohn DOE Compliant BEL0060AS6AMAB0200, 115/1/60, Low Profile Air Defrost, 0.9 Fan Amps with 2-Speed EC Motor (Totally Enclosed) motor
- (1) Extended 4 year compressor Warranty

Wall Panels

Interior Finish: 26 Ga. Stucco Embossed Acrylume

Exterior Finish: 26 Ga. Stucco Embossed Acrylume

Ceiling Panels

Interior Finish: 26 Ga. Stucco Embossed Acrylume

Exterior Finish: 26 Ga. Stucco Embossed Acrylume

Accessories Shipped Loose

- (4) 48" LED LIGHT STRIP FIXTURE 96 LUMENS /WATT 120VAC, 0.33 AMPS - TEMP RANGE: -30°F-104°F, SHIP LOOSE RECOMMENDED ONE FIXTURE EVERY 144 SQ. FT. AT 12' HIGH

Customer Approval:

Quote #: 26-10367 Revision: 1


Project: Item 1 Combo

Date: 04/08/2026


Customer:Horeca

Page 2 of 3




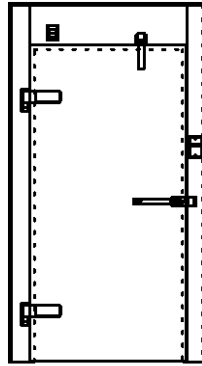

D1

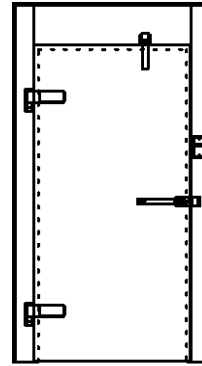


D2

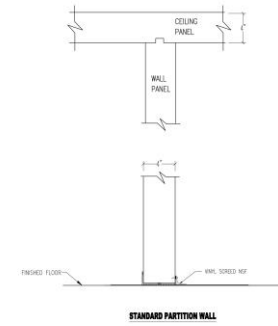


STANDARD PARTITION WALL

20013: STANDARD PARTITION WALL UPCHARGE, NO FLOOR (PER LINEAR FT. OF PARTITION WALL LENGTH)



FLUSH DOOR JAMB ALUMINUM ANGLE

20018: INTERIOR: FLUSH DOOR JAMB ALUMINUM ANGLE 1 1/2" X 1 1/2" X 5 1/4" TO SECURE TO CONCRETE FLOOR QUANTITY 2 REQUIRED

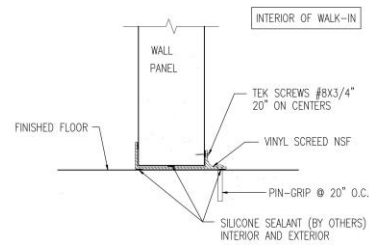

VINYL CREED WALL PANEL

8823: NSF VINYL FLOOR SCREED 72"

Quote #: 26-10367 Revision: 1

Project: Item 1 Combo

Date: 04/08/2026

Customer: Horeca

Page 3 of 3

