



# KMH-2100S\_J(Z)(3)

HIGH CAPACITY STACKABLE ICE CUBER



KMH-2100S\_J(Z)(3)  
07/02/24  
Item # 13257

W x D x H  
36" x 40" x 36<sup>7/16</sup>"

## KM|EDGE™

**KMH-2100SRJZ ★**  
Remote Air-Cooled 1 Phase

**KMH-2100SWJ3**  
Water-Cooled 3 Phase

**KMH-2100SRJZ3 ★**  
Remote Air-Cooled 3 Phase

*Shown on a Kloppenberg 2115  
Double Upright Bin*



Please allow for adequate lead time when placing orders



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 2060 lbs. of ice production per 24 hours
- Stackable for 8240 lbs. per 24 hours ice production in the same floor space
- Durable stainless steel exterior
- EverCheck alert system 
- 40-inch depth
- R-404A Refrigerant

### Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 45.75" x 39.5" x 42.44" Volume: 44.38ft<sup>3</sup>


|           |        |               | ICE PRODUCTION                                                 |      | WATER USAGE                               |                                             | ELECTRICAL                            |                                    |          |              |                                        |                              |                                  |                             |
|-----------|--------|---------------|----------------------------------------------------------------|------|-------------------------------------------|---------------------------------------------|---------------------------------------|------------------------------------|----------|--------------|----------------------------------------|------------------------------|----------------------------------|-----------------------------|
| Condenser |        | Model         | Air / Water Temp<br>Lbs. per 24 hours<br>70°/ 50°F   90°/ 70°F |      | Potable<br>Gal. per 100 lbs.<br>90°/ 70°F | Condenser<br>Gal. per 100 lbs.<br>90°/ 70°F | kWh Used<br>per 100 lbs.<br>90°/ 70°F | Min. Circuit/<br>Max. Fuse<br>Size | Amperage | Voltage      | Circuit<br>Wires<br>(including ground) | Heat<br>Rejection<br>BTU/hr. | Refrigerant<br>Charge Amount     | Net / Ship<br>Weight (lbs.) |
| 1 Phase   | Remote | KMH-2100SRJZ  | 2034                                                           | 1850 | 15.0                                      | N/A                                         | 3.75                                  | 30A                                | 15.1A    | 208-230/60/1 | 4*                                     | 22,600                       | 8 lbs. 6 oz.<br>16 lbs. 1.5 oz.† | 365 / 415                   |
|           | Water  | KMH-2100SWJ3  | 2060                                                           | 2000 | 15.0                                      | 92                                          | 2.92                                  | 20A                                | 10A      | 208-230/60/3 | 4                                      | 22,400                       | 3 lbs. 1.4 oz.                   | 365 / 415                   |
| 3 Phase   | Remote | KMH-2100SRJZ3 | 2026                                                           | 1925 | 15.0                                      | N/A                                         | 3.67                                  | 20A                                | 12.5A    | 208-230/60/3 | 4                                      | 22,900                       | 8 lb. 6 oz.<br>16 lbs. 1.5 oz.†  | 365 / 415                   |

\*If neutral is not available transformer kit (HS-5030) is required. Refer to instruction manual for installation and electrical requirements.

<sup>†</sup>(with condenser)

Power cord not included

## KMEdge™ Cube Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Min. 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent **Water-Cooled Model (Lines Must Be Independent of Icemaker)**
- Condenser Water Supply Line: Min. 3/8" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Min. 3/8" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

## Water Filter

Please refer to water filter spec sheet for recommended configurations.

Hoshizaki reserves the right to change specifications without notice.



# KMH-2100S\_J(Z)(3)


HIGH CAPACITY STACKABLE ICE CUBER

KMH-2100S\_J(Z)(3)


07/02/24

Item # 13257

FRONT VIEW

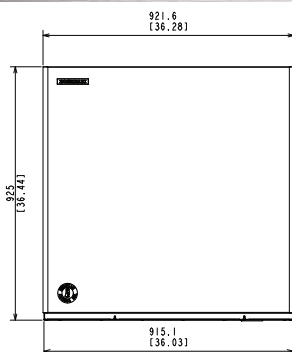


WATER-COOLED



REMOTE AIR-COOLED


SIDE VIEW

Front  
→

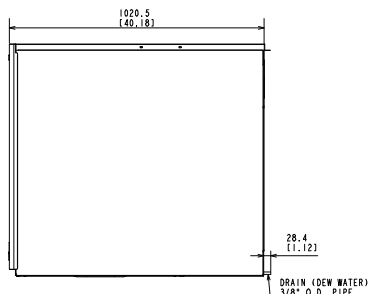


WATER-COOLED

Front  
→

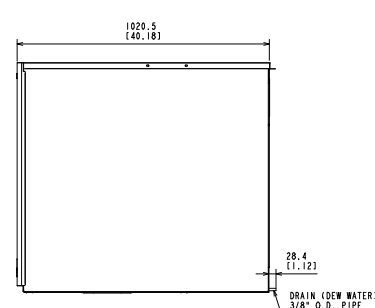


REMOTE AIR-COOLED

REAR VIEW

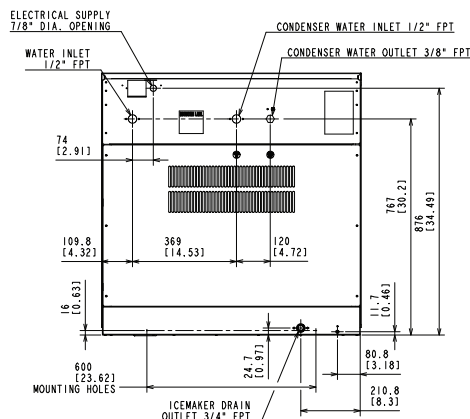


WATER-COOLED

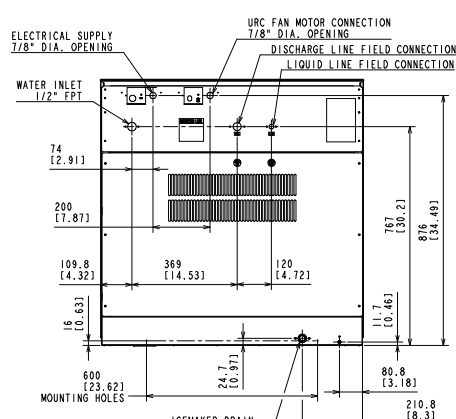

REMOTE AIR-COOLED

BOTTOM VIEW

Front  
→

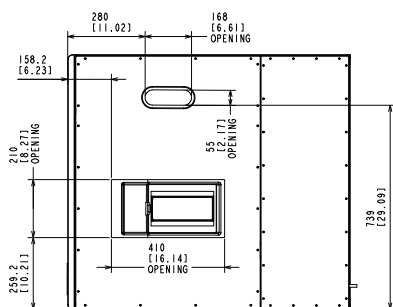

WATER-COOLED  
REMOTE AIR-COOLED

## URC-22FZ Remote Condenser (Sold Separately)

(W x D x H) 46 3/8" X 14 1/16" X 40 1/2"  
For Use with KMH-2100SRJZ(3)

### Brazed Line Sets (Sold Separately)

25' HS-5323

35' HS-5324

55' HS-5325

Voltage supply for the URC  
Remote Condenser is supplied  
from the Ice Maker. No additional  
circuit is required.

