ITB Dual Dilution w/Sweetener

Height: 35.0" (88.9cm) Width: 12.2" (31.0cm) Depth: 22.9" (58.2cm)

Server(s) sold separately

- Sleek, modernized design language on the brewer, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and two batch sizes
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Specifically designed to accommodate and brew into two BUNN 3.5gal Narrow Tea Dispensers (can also brew directly into standard tea dispensers)
- Each brew button's sweetener may be independently set and easily adjusted using the Sweet Meter
- "Out of Sweetener" indicator - LED blinks to aid operator
- Separate inlet for sweetener - use existing CO2 systems or external 3rd party pump for sweetener delivery
- Dilution nozzles labeled "Sweet" and "Unsweet"

Agency:

UL LISTED NSF

Specifications

Product #: 52000.0300

Water Access: Plumbed

Finish: Stainless

Funnel: Translucent Tea Funnel

Additional Features

Funnel Locks

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	336	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	1.25

CAD Drawings

2D	Revit	KLC
●		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/08/2025

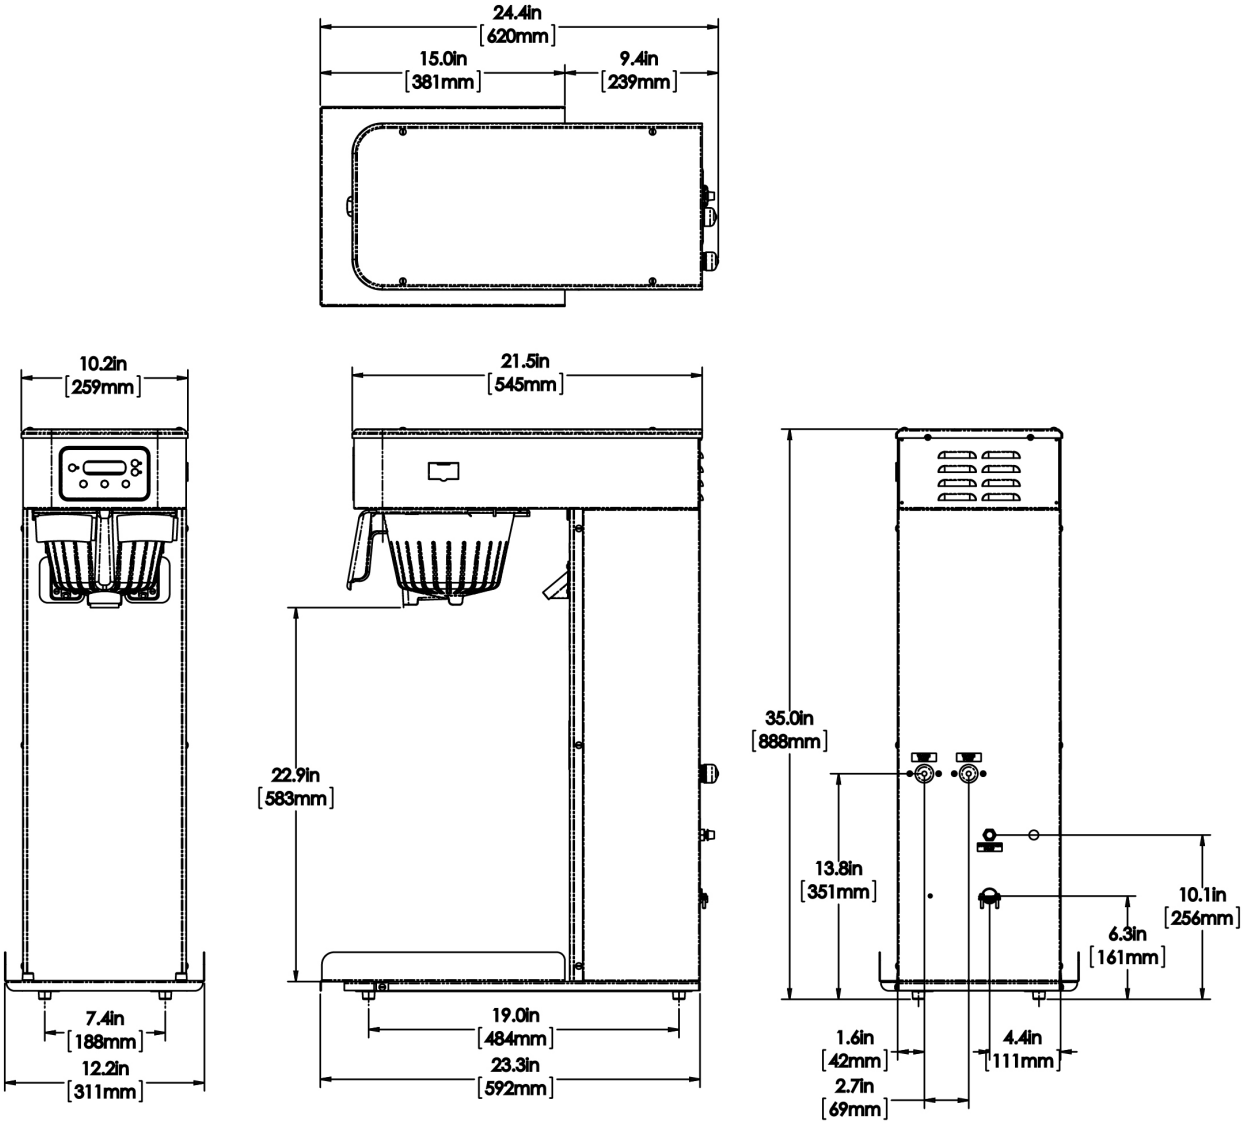

	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	12.2 in.	22.9 in.	39.0 in.	15.9 in.	27.5 in.	45.800 lbs	9.853 ft³
Metric	88.9 cm	31.0 cm	58.2 cm	99.1 cm	40.3 cm	69.9 cm	20.775 kgs	0.279 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/08/2025

Related Products & Accessories: ITB Dual Dilution w/Sweetener(52000.0300)

FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000

WATER FILTER, EQHP-TEA

Product #: 39000.0007

FUNNEL ASSY, ROTATIONAL INFUSION TEA(NAT

Product #: 53463.0012[2]

SYSTEM, WQ-SFTN4000 (1.5)10 TEA

Product #: 56000.0021[1]

SYSTEM, WEQ-SFTN3500(1)10 TEA

Product #: 56000.0030

CARTRIDGE, WEQ-SFTN3500(1)10 TEA

Product #: 56000.0129[1]

CARTRIDGE, WQ-SFTN4000(1.5)10 TEA

Product #: 56000.0133[1]

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Mavea LLC [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/08/2025

Serving & Holding Options: ITB Dual Dilution w/Sweetener(52000.0300)

TDO-N-3.5, RSVR	TDO-N-3.5, RSVR W/ LIFT HANDLE	TDO-N-3.5, RSVR W/ PINCH TUBE	TD3T-N, RSVR BREW THRU LID BUNN	TD3T-N, RSVR SOLID LID BUNN
Product #: 39600.0001[1]	Product #: 39600.0031[1]	Product #: 39600.0047[1]	Product #: 43900.0001[1]	Product #: 43900.0002[1]

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Mavea LLC [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/08/2025