



KMS-822MLJ

SERENITY SERIES CUBER ICE MACHINE



KMS-822MLJ
07/02/24
Item # 13262

Modular Head Unit
W x D x H
22" x 24^{5/8}" x 28"

Remote Unit Dimension
SRK-10J
35^{3/4}" x 23^{1/2}" x 22"

Installation Dimension*
SRK-10J
38" x 29" x 37"

*Dimensions include legs

KM|EDGE™
SRK-10J



KMS-822MLJ
Remote Air-Cooled
Shown on optional
Lancer 22" Dispenser



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 851 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- EverCheck™ alert system 
- No heat, less noise
- CFC / HFC Free Foam
- R-404A Refrigerant
- Not recommended for side-by-side application
- Remote unit includes both condenser and compressor

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: KMS-822MLJ (LxWxH) 31" x 28" X 34" Volume: 17.08ft³


		ICE PRODUCTION		WATER USAGE		ELECTRICAL				
Condenser	Model	Air / Water Temp Lbs. per 24 hours		Potable	Condenser	kWh Used	Voltage	Circuit Wires (including ground)	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		70°F / 50°F	90°F / 70°F	Gal. per 100 lbs. 90°F / 70°F	Gal. per 100 lbs. 90°F / 70°F	per 100 lbs. 90°F / 70°F				
Remote	KMS-822MLJ with SRK-10J	851	770	21.0	N/A	5.3	208-230V/60/1 *	See remote condenser	7.1 oz.	120 /150

* Voltage supply for KMS Ice Maker is supplied from the SRK Remote Condenser

		LINE SETS - Brazing Required			TEMP RANGE	ELECTRICAL							
Condenser	Model	25' Length	35' Length	55' Length	Ambient (Outdoor Use)	Voltage Range	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Remote	SRK-10J	HS-0250†	HS-0251†	HS-0252†	-20° - 122°	187-253VAC	20A	11.9A	208-230V/60/1	4	14,700	13 lb. 10.7 oz.	196 /226

† Line sets require refrigerant.

KMEdge™ Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits- KMS-822MLJ

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187-253V†
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

† Voltage supply for KMS Ice Maker is supplied from the SRK Remote Condenser

Service- KMS-822MLJ

- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance and/or service should they be required.
- Panels easily removed and all components accessible for service.

Plumbing- KMS-822MLJ

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Service- SRK-10J

- Allow 24" (61 cm) clearance in both front and rear for proper air circulation and ease of maintenance/service.
- For best performance the Remote Condenser should not be more than 33 feet above the icemaker or no more than 10 feet below it. These distances are measure from fitting to fitting.

Power cord not included. Must be hard-wired at site.

Printed in the U.S.A.

Hoshizaki reserves the right to change specifications without notice.




KMS-822MLJ

SERENITY SERIES CUBER ICE MACHINE




KMS-822MLJ
07/02/24
Item # 13262

FRONT VIEW

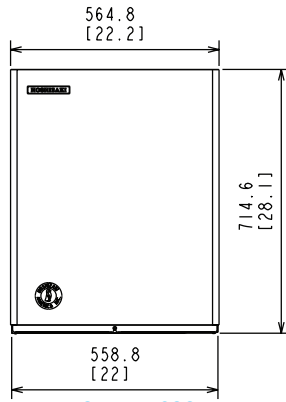


REMOTE AIR-COOLED

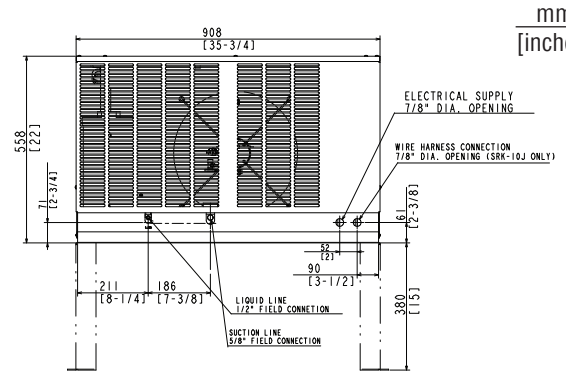


SRK-10J REMOTE CONDENSER

SIDE VIEW

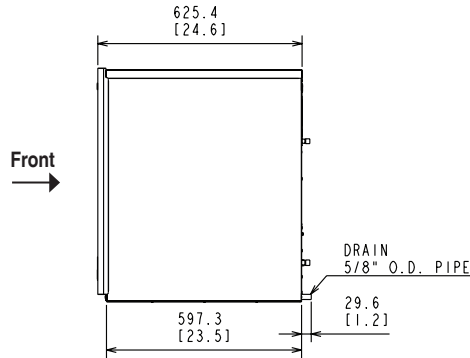


REMOTE AIR-COOLED

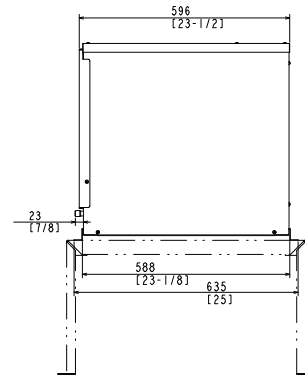


SRK-10J REMOTE CONDENSER

REAR VIEW

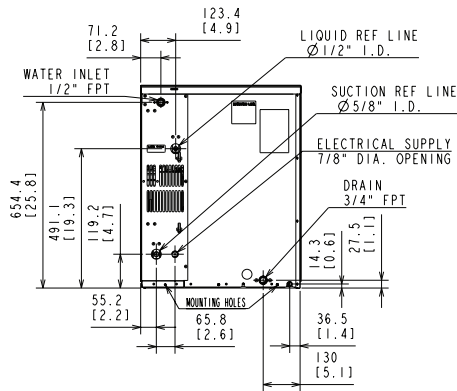


REMOTE AIR-COOLED

TOP VIEW

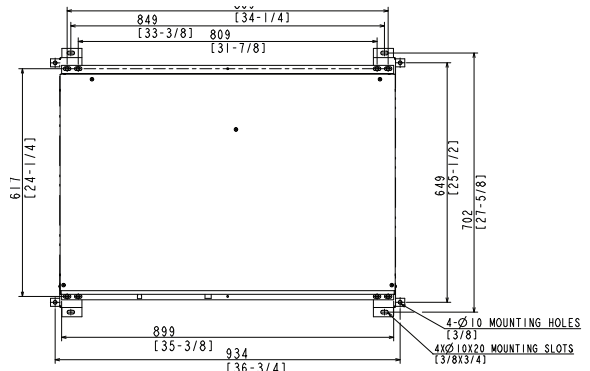

SRK-10J Remote Condenser (Sold Separately)
35 3/4" x 23 1/2" x 37" (W x D x H with legs)
For Use with KMS-822MLJ

BOTTOM VIEW

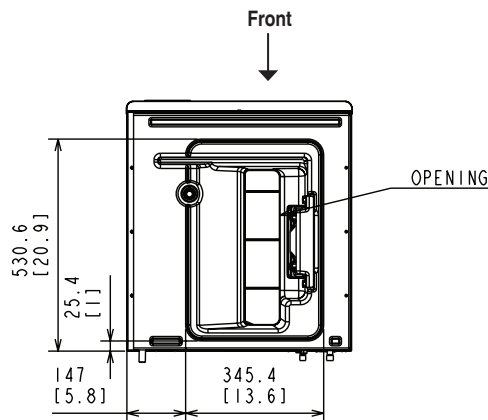

REMOTE AIR-COOLED

Braze Line Sets
(Sold Separately)
25' HS-0250
35' HS-0251
55' HS-0252
Voltage supply for the KMS Ice
Maker is supplied from the SRK
Remote Condenser.

