HIGH VOLUME
COFFEE BREWING SYSTEMS

STATIONARY Series

CBS-72A (FOR COUNTERTOPS)

Twin 6.0 Gallon Station

FETCO® is the category expert and the ONLY manufacturer of ultra high-volume (7-24 Gallon) portable coffee brewing systems for very large scale operations.
Due to the high capacity output and reliable performance the CBS-7000 Series is the preferred choice for specification in hotels, stadiums, convention centers and other large venues.



Shown with 6.0 Gallon LUXUS® Thermal Dispensers (LBD-6)



Set it and forget it.
Once your recipe parameters are programmed in, this brewer delivers consistent and repeatable results.



Steam Control.
Efficient, steam containing brew compartments virtually eliminate the need for external ventilation, making this system extremely adaptable to any Foodservice environment.



Expand Your Service.
Brew directly into a High-Capacity LBD Series Thermal Dispenser (sold separately) and transport for high volume coffee or refill service anywhere throughout your venue.

FETCO®
TRUSTED | RELIABLE | QUALITY

CBS-72A

Technical Specifications / Accessories

Water Specification

Water Inlet	Minimum Flow Rate	Water Pressure
⅜" male flare fitting	3 gpm [11.4 lpm]	20-75 psig [138-517 kPa]


Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
US & CANADA								
C72017[1]	2 x (3x5.0) kW	120/208-240	3	4+G	11.5-15.1	Terminal Block	31.9-36.8	24.0-36.0 [90.8-136.6][4]
C72027[2]	2 x (3x5.0) kW	120/208-240	3	4+G	23.0-30.2	Terminal Block	63.8-73.6	36.0-42.0 [136.3-159.0][4]
C72037[1]	2 x (3x10.0) kW	120/208-240	3	4+G	22.8-30.1	Terminal Block	63.2-72.9	54.0-60.0 [204.4-227.1][4]
C72047[1]	2 x (3x10.0) kW	440-480[3]	3	3+G	20.8-30.0	Terminal Block	30.1-36.1	60.0 [227.1][4]
C72057[2]	2 x (3x10.0) kW	440-480[3]	3	3+G	41.7-60.0	Terminal Block	60.1-72.2	60.0 [227.1][4]
INTERNATIONAL								
C72107	2 x (3 x 5.0) kW	220-240/380-415	3	4+G	12.9-15.1	Terminal Block	19.5-21.3	18.2 [69.0][1]
C72117	2 x (3 x 10.0) kW	220-240/380-415	3	4+G	25.5-30.1	Terminal Block	38.6-42.1	24.3-30.4 [92.0-115.0][1]

(1) With power management.
(2) Without power management.
(3) Plus power cord for control, 120 VAC.
(4) Based on standard factory settings: 7.0 minute brew time; 0% prewet; 200°F water.

Measurements

Height	Width	Depth	Empty Weight	Filled Weight	Shipping Weight	Shipping Dimensions:
48½" [123.1 cm]	36" [91.4 cm]	37" [94.0 cm]	420 lbs [190.5 kg]	720 lbs [326.6 kg]	659 lbs [298.9 kg]	55" x 48" x 42" [139.7 x 121.9 x 106.7 cm]

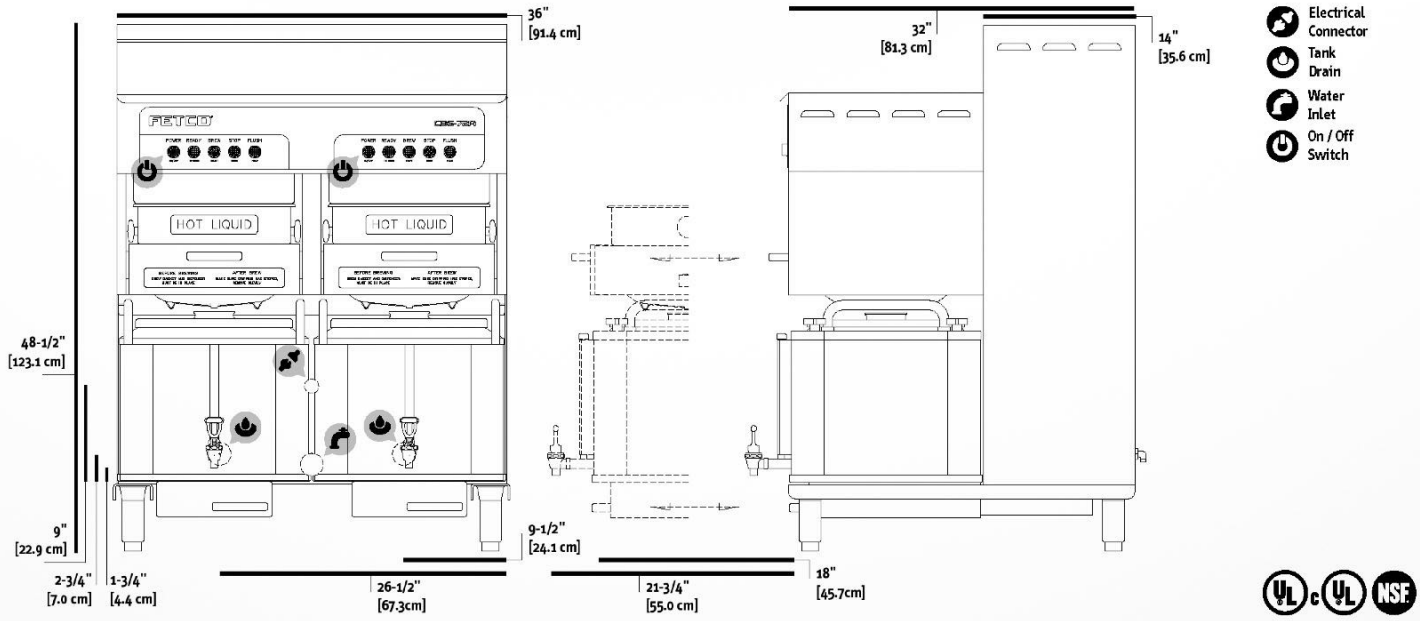

Compatibile Dispensers

6.0 Gallon LUXUS® Thermal Dispenser (LBD-6)	D019

Customize Your Brewer

Serving Station for LBD-6 with Drip Tray	A018
Counter for CBS-72A (CTR-72)	A020
Identifier Plates, Acrylic	A069

Cups per Hour*

8oz. 960 12oz. 640 16oz. 480 20oz. 384

* Approximate based on maximum power setting.

Paper Coffee Filters

23" x 9" (500/Case)	F006

Information

fetco.com
info@fetco.com
847.719.3000
1.800.338.2699 USA
847.719.3001
Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA

© Copyright 2018 FETCO® is a mark of Food Equipment Technologies Company.

FETCO®