



# DUKERS

Quality Commercial Refrigeration



## SALAD PREP TABLE

DSP60-24M-S2

2-Door / Mega Top



### TECHNICAL SPECIFICATIONS

|                       |                 |
|-----------------------|-----------------|
| Voltage/Frequency     | 115V/60Hz       |
| Refrigerant           | R290            |
| Type of Defrost       | Automatic       |
| Interior Material     | Stainless Steel |
| Exterior Material     | Stainless Steel |
| Temperature Range °F  | 33 ~ 41°F       |
| Compressor Power (HP) | 1/5             |
| Nema Config.          | NEMA5-15P       |



### PRODUCT FEATURES



The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit



Higher Resistance to dust, high quality condenser.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Self-closing doors at 60° with stay open feature.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



6" deep 1/6 plastic plan included.



High quality coated stainless adjustable shelves prevent peel and rust.



Lifetime warranty on hinges.



6" casters with lock for easy mobility.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



# DUKERS

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628



@ [info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)

# DETAILS & SPECIFICATIONS

## SALAD PREP TABLE DSP60-24M-S2

Front View

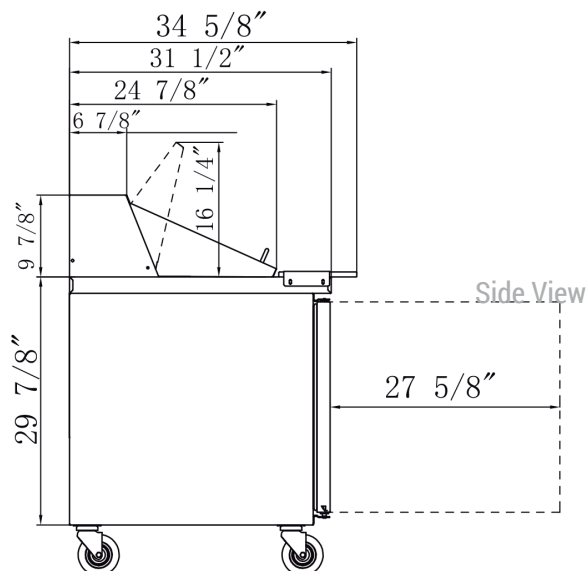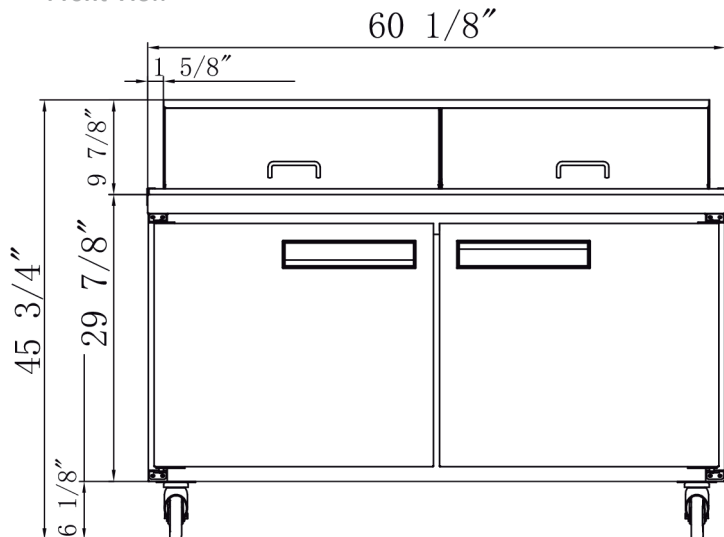

### MODEL DSP60-24M-S2

|                           |              |
|---------------------------|--------------|
| Cutting Board Size        | 60 x 9       |
| Rated Voltage             | 115V         |
| Rated Frequency           | 60Hz         |
| Total Input Power         | 280W         |
| Total Current             | 2.4A         |
| Total Capacity            | 14.33 cu ft  |
| Climatic Category         | 4-5          |
| Protection Type           | I            |
| Design Pressure High Side | 300 PSIG     |
| Design Pressure Low Side  | 150 PSIG     |
| Insulation Blowing Gas    | C-Pentane    |
| Refrigerant               | R290/3.88 oz |

### 1/6 PAN COUNT: 24

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 |
| 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 |
| 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 | 1/6 |

| MODEL        | EXTERNAL DIMENSION<br>WXDXH (INCHES) | PACKAGING DIMENSION<br>WXDXH (INCHES) | PRODUCT NET<br>WEIGHT | # OF<br>SHELVES | 40HQ<br>CONTAINER CERT. |
|--------------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| DSP60-24M-S2 | 60 1/8 x 31 1/2 x 46                 | 64 3/8 x 35 7/8 x 48 3/8              | 275 lbs               | 2               | 28                      |



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628  
@ info@dukersusa.com  
www.DukersUSA.com