



# KM-2200S\_J(Z)3

3 PHASE STACKABLE ICE CUBER



KM-2200S\_J(Z)3  
07/02/24  
Item # 13061

W x D x H  
48" x 27<sup>3/8</sup>" x 36<sup>7/16</sup>"

Shipping Dimensions  
51<sup>3/4</sup>" x 33" x 42.5"

**KM|EDGE™**

**KM-2200SWJ3**  
Water-Cooled 3 Phase  
Shown on optional bin: B-900

**KM-2200SRJZ3★**  
Remote Air-Cooled 3 Phase



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

► Individual crescent cube

► Stainless steel evaporator

► CycleSaver™ design 

- Up to 2221 lbs. of ice production per 24 hours
- Stackable for 4442 lbs. per 24 hours ice production in the same floor space
- Durable stainless steel exterior
- EverCheck™ alert system 
- R-404A Refrigerant

### Available on Bins:

**B-800**    **B-1150SS**    **B-1500SS**    *Top kit may be required.*  
**B-900**    **B-1300SS**    **B-1650SS**    *See Bin Spec Sheets.*


### Warranty:

Valid in United States, Canada, Puerto Rico and U.S. Territories.  
Contact factory for warranty in other countries.

|           |        |              | ICE PRODUCTION                                                |      | WATER USAGE                              |                                            | ELECTRICAL                           |                                    |          |               |                                                       |                              |                                  |                             |
|-----------|--------|--------------|---------------------------------------------------------------|------|------------------------------------------|--------------------------------------------|--------------------------------------|------------------------------------|----------|---------------|-------------------------------------------------------|------------------------------|----------------------------------|-----------------------------|
| Condenser |        | Model        | Air / Water Temp<br>Lbs. per 24 hours<br>70°/50°F    90°/70°F |      | Potable<br>Gal. per 100 lbs.<br>90°/70°F | Condenser<br>Gal. per 100 lbs.<br>90°/70°F | kWh Used<br>per 100 lbs.<br>90°/70°F | Min. Circuit/<br>Max. Fuse<br>Size | Amperage | Voltage       | Circuit<br>Wires<br><small>(including ground)</small> | Heat<br>Rejection<br>BTU/hr. | Refrigerant<br>Charge Amount     | Net / Ship<br>Weight (lbs.) |
| 3 Phase   | Water  | KM-2200SWJ3  | 2221                                                          | 2200 | 15.0                                     | 95                                         | 3.11                                 | 30A                                | 12.8A    | 208-230V/60/3 | 4                                                     | 27,200                       | 2 lbs. 16 oz.                    | 390 / 400                   |
|           | Remote | KM-2200SRJZ3 | 2206                                                          | 2075 | 15.0                                     | N/A                                        | 3.75                                 | 20A                                | 15.9A    | 208-230V/60/3 | 4                                                     | 26,700                       | 8 lbs. 6 oz.<br>16 lbs. 1.5 oz.† | 390 / 400                   |

† (with condenser)

## KMEdge™ Cube Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Min. 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Min. 3/8" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Min. 3/8" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

## Water Filter

Please refer to water filter spec sheet for recommended configurations.

Hoshizaki reserves the right to change specifications without notice.



# KM-2200S\_J(Z)3


3 PHASE STACKABLE ICE CUBER

KM-2200S\_J(Z)3


07/02/24

Item # 13061

FRONT VIEW

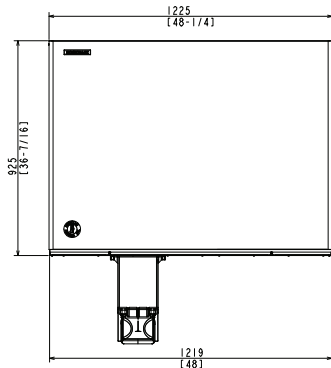


WATER-COOLED

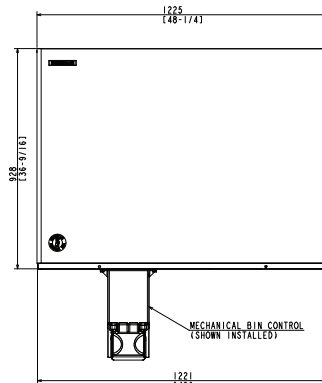


REMOTE AIR-COOLED

SIDE VIEW

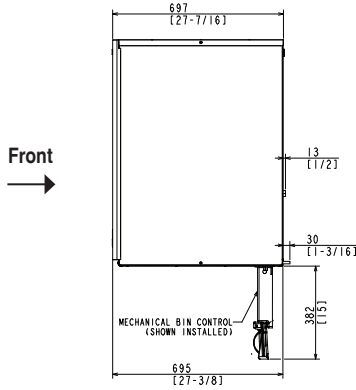


WATER-COOLED

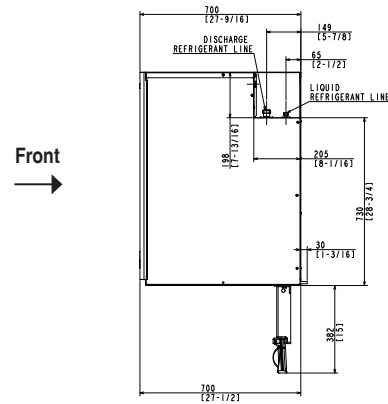


REMOTE AIR-COOLED

REAR VIEW

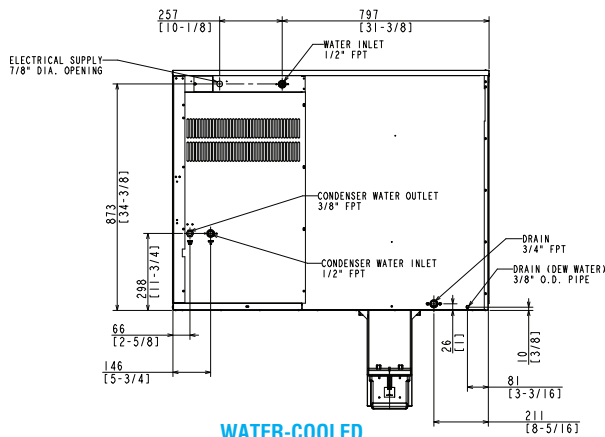


WATER-COOLED

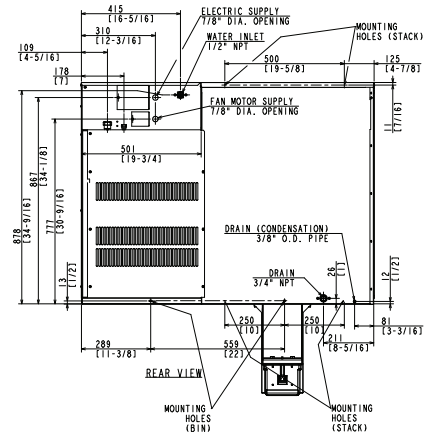


REMOTE AIR-COOLED

BOTTOM VIEW

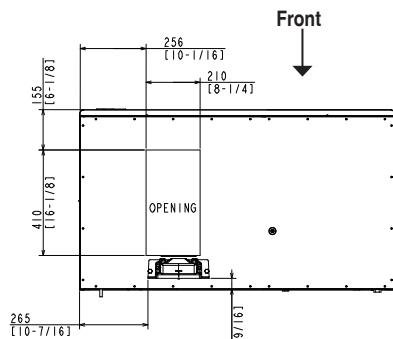

WATER-COOLED



REMOTE AIR-COOLED

**URC-22FZ Remote Condenser (Sold Separately)**  
(W x D x H) 46 3/8 X 14 1/16 X 40 1/2  
For Use with KM-2200SRJZ3

**Brazed Line Sets**  
(Sold Separately)  
25' HS-5323  
35' HS-5324  
55' HS-5325



Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

