

DUKERS

Quality Commercial Refrigeration

Front Slide Out Platform

REACH IN REFRIGERATOR

D47ER

Bottom Mounted / 2-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interial Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	33 ~ 41°F
Compressor Power (HP)	1/2-
Nema Config.	NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Front sliding out compressor and condenser for easy maintenance and service.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 ~ 41° degrees Fahrenheit.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Adjustable front locking casters.
- Hinged glass doors, tempered glass, UV blocking.
- Lifetime warranty on hinges.
- Equipped with Locking Doors.

HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

DUKERS


Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com


DETAILS & SPECIFICATIONS

D47ER

Front View

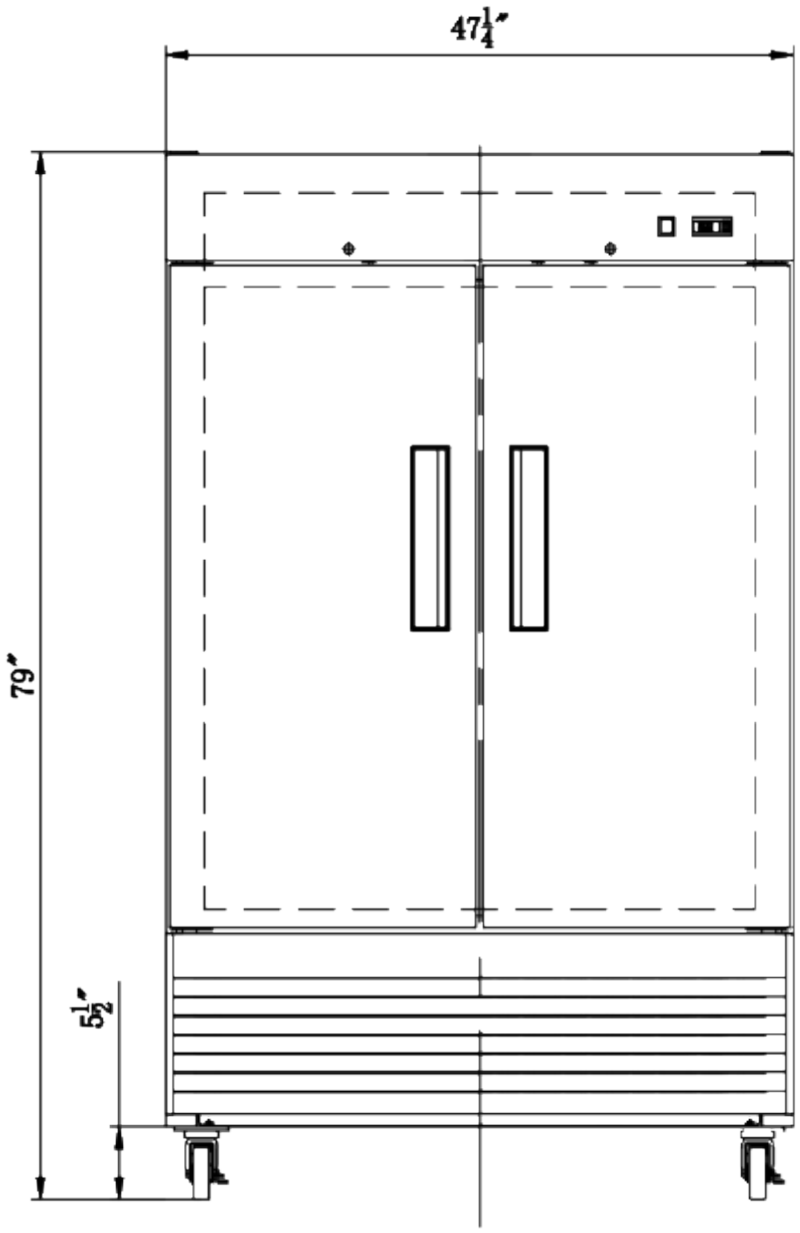

Side View

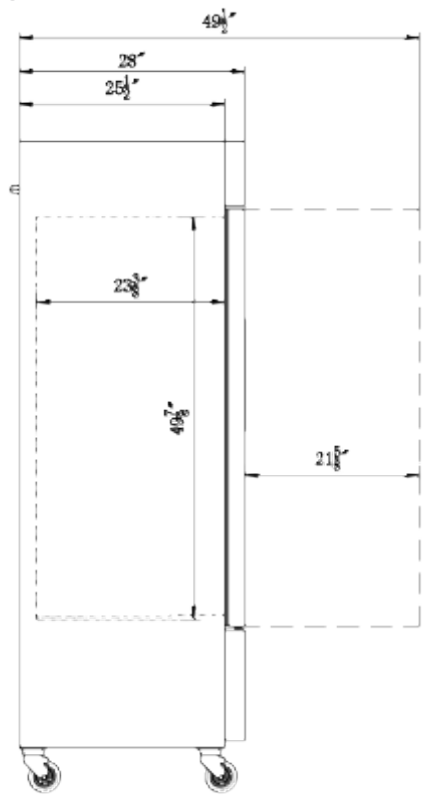

MODEL D47ER	
Rated Voltage	110V
Rated Frequency	60Hz
Total Capacity	29.51 cu ft
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D47ER	47 1/4 x 28 x 79	48 7/8 x 30 x 83	220 lbs	6	28

NATURAL REFRIGERANT · PROUD MEMBER CFESA · AutoQuotes · Intertek · Intertek · 115/60/1 NEMA-5-15P

DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com