



**DUKERS**  
Quality Commercial Refrigeration



## REACH IN FREEZER

D55F

Bottom Mounted / 2-Solid Door



### **i** TECHNICAL SPECIFICATIONS

|                       |                 |
|-----------------------|-----------------|
| Voltage/Frequency     | 115V/60Hz       |
| Refrigerant           | R290            |
| Type of Defrost       | Automatic       |
| Interior Material     | Stainless Steel |
| Exterior Material     | Stainless Steel |
| Temperature Range °F  | 0 ~ -8°F        |
| Compressor Power (HP) | 1-              |
| Nema Config.          | NEMA5-15P       |



## PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



**HIGH QUALITY  
STAINLESS STEEL &  
ROBUST DESIGN**



**DUKERS**

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628


[info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)


# DETAILS & SPECIFICATIONS

## D55F

Front View

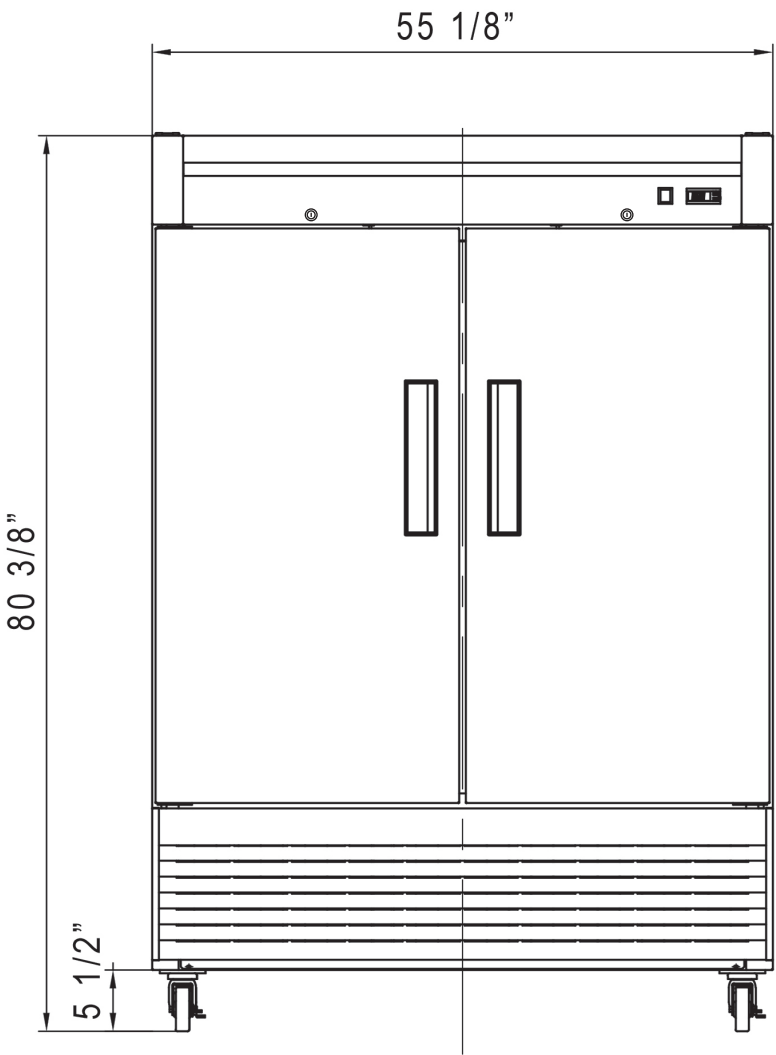

Side View

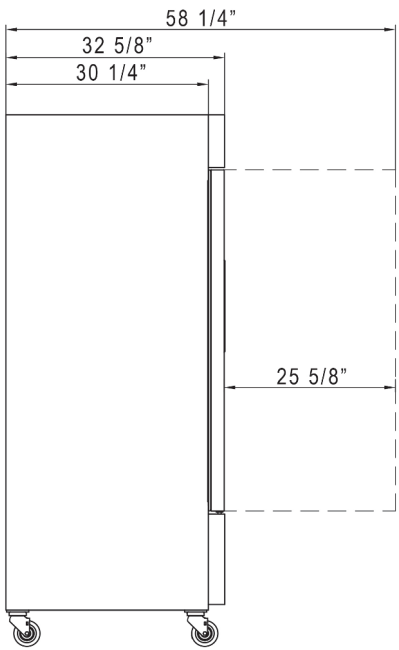

### MODEL D55F

|                           |              |
|---------------------------|--------------|
| Rated Voltage             | 115V         |
| Rated Frequency           | 60Hz         |
| Total Input Power         | 1250W        |
| Total Current             | 11.8 A       |
| Total Capacity            | 40.74 cu ft  |
| Climatic Category         | 4-5          |
| Protection Type           | I            |
| Design Pressure High Side | 300 PSIG     |
| Design Pressure Low Side  | 150 PSIG     |
| Insulation Blowing Gas    | C-Pentane    |
| Refrigerant               | R290/5.11 oz |

| MODEL | EXTERNAL DIMENSION<br>WXDXH (INCHES) | PACKAGING DIMENSION<br>WXDXH (INCHES) | PRODUCT NET<br>WEIGHT | # OF<br>SHELVES | 40HQ<br>CONTAINER CERT. |
|-------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| D55F  | 55 1/8 x 32 5/8 x 80 3/8             | 57 1/8 x 34 5/8 x 82 3/8              | 463 lbs               | 8               | 21                      |



AutoQuotes



115/60/1  
NEMA-5-15P



**DUKERS**

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey



1-800-931-8628



info@dukersusa.com

www.DukersUSA.com