VALYR™
BY STRATA GPO

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

VTG24N
24" Thermostatic Gas Griddle




MODEL: ☐ VTG24N

SPECIAL FEATURES


- Fully welded stainless steel front, sides, and splash guards
- 1" thick polished steel griddle plate
- Separate gas valves for each burner
- 30,000 BTU per burner
- (1) U-shaped stainless steel burner for every 12" griddle width
- Adjustable thermostat from 200° to 450°F
- 3” wide grease trough
- Easy to clean removable stainless steel drip tray
- 4 to 5” adjustable legs
- 3/4” rear NPT gas inlet
- Field convertible to LPG

TECHNICAL DATA

MODEL	DIMENSIONS	TOTAL BTU / HR	NUMBER OF BURNERS	NUMBER OF DRIP TRAYS	NET WEIGHT (LBS)	GROSS WEIGHT (LBS)
VTG24N	24" x 32" x 16" (610 x 813 x 406 mm)	60,000	2	1	140 lbs (64 kg)	200 lbs (91 kg)



FRONT

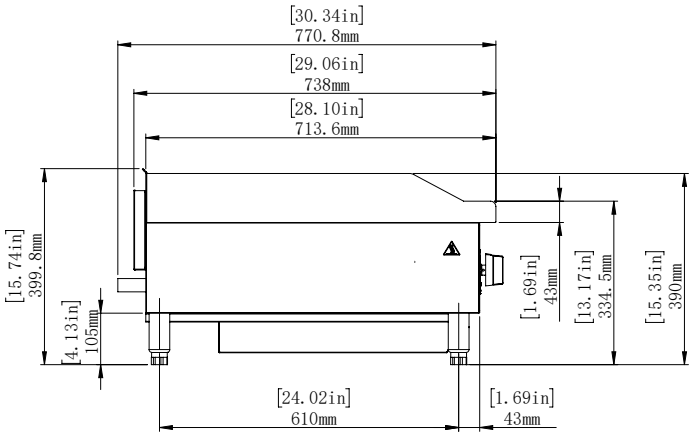

SIDE

Intertek

Intertek

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

© 2026 VALYR