

COFFEE BREWING SYSTEMS

CBS-1230 Plus Brewers

3.0-4.0 LITER BREWING SYSTEM

Shown with D041 3.0L Airpot & D451 4.0L / 1G LUXUS® Thermal Server



PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design makes for less service calls.

FEATURES

CBS-1230 Plus Brewers



BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



ECO MODE

Reduces tank temperature during periods of non-operation to cut down on electricity usage.



DISPENSERS

CBS-1230 Plus Brewers

DISPENSERS

D037

1.9 Liter
Tall Server

NSF



D078

2.2 Liter
Glass Lined Pump
Lever Airpot

NSF



D080

2.2 Liter
Pump Lever
Airpot

NSF



D081

2.5 Liter
Pump Lever
Airpot

NSF



D041

3.0 Liter
Pump Lever
Airpot

NSF



D063

3.8 Liter
Pump Lever
Airpot

NSF



FOR USE WITH
2.5" OPTIONAL LEGS

D451

4.0 Liter / 1 Gallon
LUXUS® Thermal
Server
L4S-10

NSF



D482

4.0 Liter / 1 Gallon
LUXUS® Sight
Gauge Server
LGS-10

NSF



SERVING STATION FOR THERMAL SERVERS

A147

Single Serving
Station for
L4S-10 & LGS-10
S4S-10-1



A148

Twin Serving
Station for
L4S-10 & LGS-10
S4S-10-2



A149

Triple Serving
Station for
L4S-10 & LGS-10
S4S-10-3



All dispensers and serving stations **SOLD SEPARATELY**.

ACCESSORIES

CBS-1230 Plus Brewers

NOTE

Coffee brewers are available with **Plastic** or **Metal** brew basket options. Material type is of personal preference and does not affect flavor profile, however if you are looking for color identification the plastic brew baskets are the best option.

BREW BASKETS AND PAPER FILTERS

Item Number	Brew Basket	Coffee Capacity	Filter Size	Filter SKU	Filter/Case
All configurations	Standard Plastic / Stainless Steel	Up to 8oz / 227g	13" x 5"	F002	500/cs

B003218B1

13" x 5"
Large Metal
Basket

**B014218BN2BK**

13" x 5"
Plastic Brew
Basket

**F002**

13" x 5"
Paper Filters



Contact Customer Service or your Sales Person for more options.

COLORED BREW BASKET HANDLE INSERTS

1023.00180.00

Blue Insert

**1023.00190.00**

Red Insert

**1023.00191.00**

Green Insert

**1023.00192.00**

Orange Insert



LEGS SETUP OPTIONS

Comes standard with
1" and 2.5" legs

1073.00019.00

1" Legs

**1073.00016.00**

2.5" Legs



WATER FILTRATION SYSTEM

Filtration System	Item Number	Item Description	Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

EVERPURE®

In-Line Water
Filtration System



SET INCLUDES: 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve


BWT BESTMAX

In-Line Water
Filtration System



SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences



TECHNICAL SPECIFICATIONS

NORTH AMERICA

CBS-1231 Plus Brewer

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1231US-1A115-MM011	13x5" Metal	100-120	1 x 1.5 kW / 120 V	1	2+G	1.1-1.6	NEMA 5-15P	10.8-12.9	4.0 / 15.1	 
E1231US-1A115-PM011	13x5" Plastic	100-120	1 x 1.5 kW / 120 V	1	2+G	1.1-1.6	NEMA 5-15P	10.8-12.9	4.0 / 15.1	 
E1231US-1X117-MM011 DUAL VOLTAGE	13x5" Metal	100-120	1 x 1.7 kW / 120 V	1	2+G	1.3-1.8	NEMA 5-15P	12.2-14.6	4.5 / 17.1	 
		120/208-240	2 x 1.7 kW / 120 V	1	3+G	3.5	No Cord	14.6	7.9 / 30.0	
E1231US-1X117-PM011 DUAL VOLTAGE	13x5" Plastic	100-120	1 x 1.7 kW / 120 V	1	2+G	1.3-1.8	NEMA 5-15P	12.2-14.6	4.5 / 17.1	 
		120/208-240	2 x 1.7 kW / 120 V	1	3+G	3.5	No Cord	14.6	7.9 / 30.0	


WATER			
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	3.00 / 11.36

CBS-1232 Plus Brewer

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1232US-1B230-MM010	13x5" Metal	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	12.2 / 46.3	 
E1232US-1B230-PM010	13x5" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	12.2 / 46.3	 

WATER			
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	5.48 / 10.07

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.



TECHNICAL SPECIFICATIONS
INTERNATIONAL

CBS-1231 Plus Brewer

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1231IN-1B123-PM000	13x5" Plastic	200-240	1 x 2.3 kW / 240 V	1	L/N/PE	1.7-2.4	No Cord	8.4-10.0	6.1 / 23.2	NSF cULus
E1231IN-1B130-PM000	13x5" Plastic	200-240	1 x 3.0 kW / 240 V	1	L/N/PE	2.2-3.1	No Cord	10.8-12.9	7.9 / 30.0	NSF cULus
E1231NM-1A123-PM002¹	13x5" Plastic	100-120	1 x 2.3 kW / 120 V	1	2+G	1.7-2.4	NEMA 5-20P	16.4-19.6	6.1 / 23.2	NSF NOM
E1231NM-1B130-PM003¹	13x5" Plastic	208-240	1 x 3.0 kW / 240 V	1	2+G	2.2-3.1	NEMA 6-15P	11.2-12.9	7.9 / 30.0	NSF NOM
E1231NM-1X123-PM002 DUAL VOLTAGE	13x5" Plastic	100-120	1 x 2.3 kW / 120 V	1	2+G	1.7-2.4	NEMA 5-20P	16.4-19.6	6.1 / 23.2	NSF NOM
		120/208-240	2 x 2.3 kW / 120 V	1	3+G	4.7	No Cord	19.6	7.9 / 30.0	
E1231CE-1B123-PM005¹	13x5" Plastic	230	1 x 2.3 kW / 240 V	1	L/N/PE	2.2	CEE 7/7 Shuko	9.6	5.6 / 21.1	NSF CE
E1231CE-1B130-PM005	13x5" Plastic	230	1 x 3.0 kW / 240 V	1	L/N/PE	2.9	CEE 7/7 Shuko	12.4	7.4 / 28.2	NSF CE

WATER			
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	3.00 / 11.36

CBS-1232 Plus Brewer

ELECTRICAL										
Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1232IN-1B223-PM000	13x5" Plastic	200-240	2 x 2.3 kW / 240 V	1	L/N/PE	3.3-4.7	No Cord	16.4-19.6	12.2 / 46.3	NSF cULus
E1232IN-1B230-PM000	13x5" Plastic	200-240	2 x 3.0 kW / 240 V	1	L/N/PE	4.3-6.1	No Cord	21.2-25.4	15.8 / 60.0	NSF cULus
E1232NM-1B230-PM000	13x5" Plastic	208-240	2 x 3.0 kW / 240 V	1	2+G	4.6-6.1	No Cord	22.1-25.4	15.8 / 60.0	NSF NOM
E1232CE-2B223-PM000¹	13x5" Plastic	230/400	2 x 2.3 kW / 240 V	2	2L/N/PE	4.3	No Cord	9.6	11.2 / 42.3	NSF CE
E1232CE-2B230-PM000	13x5" Plastic	230/400	2 x 3.0 kW / 240 V	2	2L/N/PE	5.6	No Cord	12.4	14.6 / 55.4	NSF CE
E1232CE-1B223-PM000¹	13x5" Plastic	230	2 x 2.3 kW / 240 V	1	L/N/PE	4.3	No Cord	18.8	11.2 / 42.3	NSF CE
E1232CE-1B230-PM000¹	13x5" Plastic	230	2 x 3.0 kW / 240 V	1	L/N/PE	5.6	No Cord	24.4	14.6 / 55.4	NSF CE

WATER			
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	5.48 / 20.74

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

DIMENSIONS

CBS-1231 Plus Brewer

DIMENSIONS						
	Height (A)	Width (B)	Depth (D)	Depth (E)	Faucet Clearance (F)	Brew Basket Clearance (G)
Product Dimensions with 1" Standard Legs	26.25" 66.67 cm	11.75" 29.84 cm	20.5" 52.07 cm	15.13" 38.43 cm	10.63" 26.98 cm	13.13" 33.35 cm
Product Dimensions with 2.5" Optional Legs	27.75" 70.48 cm	11.75" 29.84 cm	20.5" 52.07 cm	15.13" 38.43 cm	12.13" 30.80 cm	14.63" 37.16 cm
Shipping Dimensions	30.0" 76.20 cm	17.0" 43.18 cm	22.0" 55.88 cm	N/A	N/A	N/A


WEIGHT		
	Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Weight	29 lbs 13.1 kg	55 lbs 24.9 kg
Shipping Weight	41 lbs 18.6 kg	N/A

CBS-1232 Plus Brewer

DIMENSIONS						
	Height (A)	Width (C)	Depth (D)	Depth (E)	Faucet Clearance (F)	Brew Basket Clearance (G)
Product Dimensions with 1" Standard Legs	26.25" 66.67 cm	19.75" 50.16 cm	20.5" 52.07 cm	15.13" 38.43 cm	10.63" 26.98 cm	13.13" 33.35 cm
Product Dimensions with 2.5" Optional Legs	27.75" 70.48 cm	19.75" 50.16 cm	20.5" 52.07 cm	15.13" 38.43 cm	12.13" 30.80 cm	14.63" 37.16 cm
Shipping Dimensions	30.0" 76.20 cm	23.0" 58.42 cm	25.0" 63.50 cm	N/A	N/A	N/A

WEIGHT		
	Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Weight	47 lbs 21.3 kg	92 lbs 41.7 kg
Shipping Weight	55 lbs 24.9 kg	N/A

Shown with 1" standard legs.

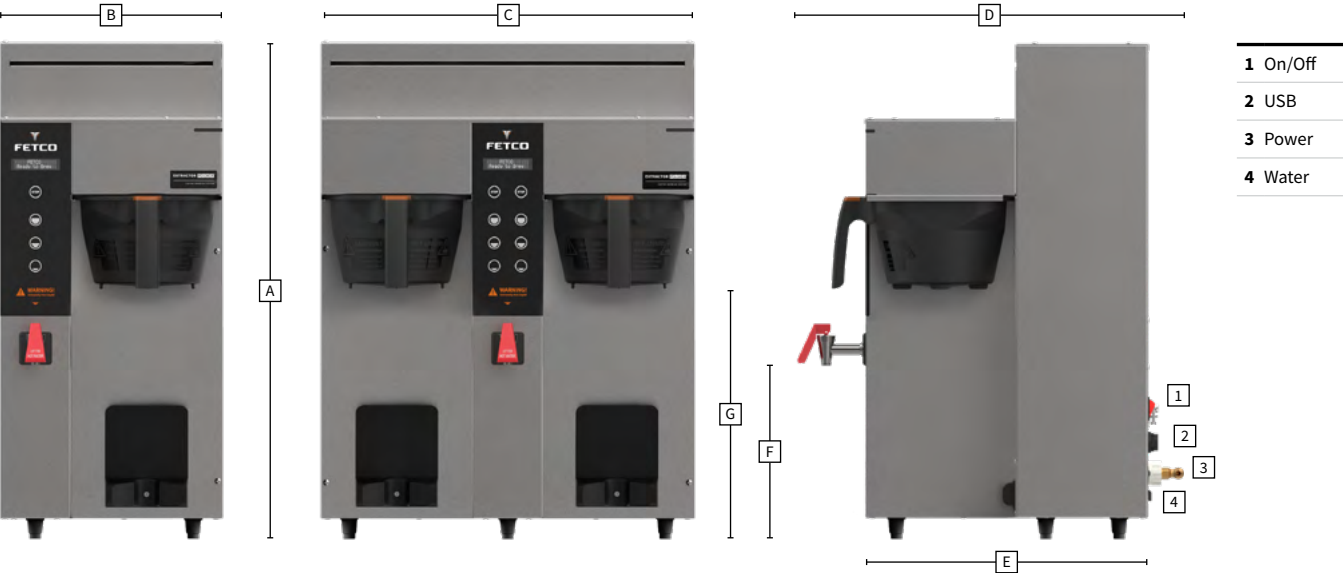

WEBSITE
fetco.com

EMAIL
inquiries@fetco.com

PHONE
+1.847.719.3000
1.800.338.2699

FAX
+1.847.719.3001

ADDRESS
FETCO®
600 Rose Road
Lake Zurich, IL 60047, USA