U.S. Range

U-Series Infra-Red Salamander Broiler

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Models

- UIR36C
- UIR36
- UIR48
- UIR60



Model UIR36

Standard Features

- Range-mount models – stainless steel top, front, sides, backsplash, and bottom w/heat shield
- Counter-mount UIR36C – stainless steel top, front, and sides – w/ 4" (102mm) legs
- 1/2" NPT top gas inlet
- Two 20,000 BTU (5.86 kW) atmospheric infrared burners
- Two individual Hi-Lo valve controls
- Large, heavy-duty knobs
- Three-position spring- balanced, adjustable rack assembly
- Large capacity, removable grease pan
- Gas regulator
- One-year limited parts & labor warranty (USA & Canada only)

Options & Accessories

- Wall-mounting kit and stainless steel main bottom w/heat shield for model UIR36C
- Rear gas inlet (standard on counter model UIR36C)
- Interconnecting gas piping for range-mount models UIR36, 48, & 60
- Available to fit all US Range U-Series ranges from 36"- 60" (900mm-1500mm) wide; standard on left, right optional on 60" (1500mm) ranges – specify
- Stainless steel back

Specifications

Range mount gas infra-red salamander broiler, Model UIR _____.

Available to mount over US Range U-Series restaurant ranges 36"- 60" (900-1500mm) wide.

Two 20,000 BTU (5.86 kW) atmospheric infra-red burners.

Three-position adjustable rack.

Stainless steel top, front, sides, backsplash, and bottom w/ heat shield.

40,000 BTU (11.72 kW) total. Natural or propane gas.

Certified to Canadian and US Standards, listed by NSF.

U-Series Infra-Red Salamander Broiler

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA


General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8097
09/24

WELBILT an Ali Group Company

U.S. Range

U-Series Infra-Red Salamander Broiler

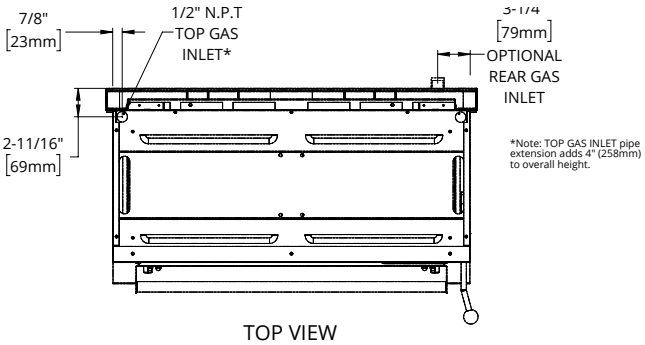


TOP VIEW

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft.


This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

Please specify gas type when ordering.

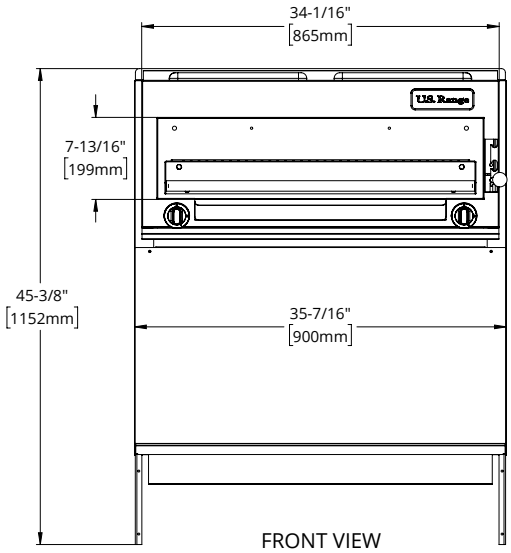

FRONT VIEW

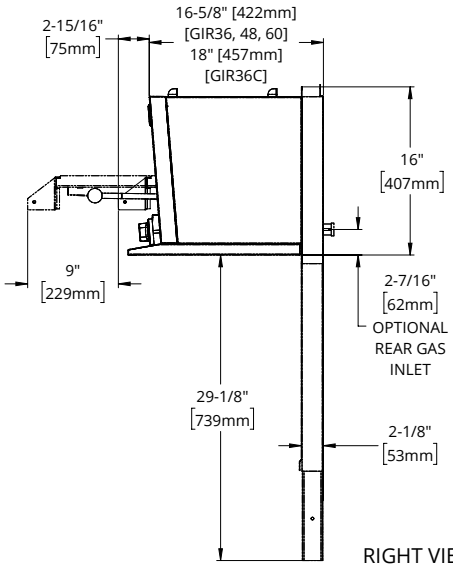

RIGHT VIEW

Rack Position		Opening Height to Cook Surface (A)
3	Highest	2-3/4" (70mm)
2	Middle	3-1/2" (87mm)
1	Lowest	4-3/8" (111mm)

***Note: TOP GAS INLET pipe extension adds 4" (258mm) to overall height.**

Model	Width	Use With U Series Model	Shipping Information		Entry Clearances: In (mm)	
			Cu Ft	lbs/Kg	Crated	Uncrated
UIR36C	34" (864mm)	N/A	21	170/77	29(737)	21(533)
UIR36	35-1/2" (900mm)**	U36	38.2	200/91	29(737)	21(533)
UIR48	47-1/4"(1200mm) (35-1/2" /900mm center mounted broiler with 47-1/4"/1200mm flue riser)	U48	60.6	230/105	29(737)	21(533)
UIR60*	59" (1500mm) (35-1/4" /900mm broiler + 24"/610mm flue riser w/shelf)	U60	60.6	260/118	29(737)	21(533)

* Note Salamander Broiler on Left Side. Right Side Optional. **Note UIR36 on Cuisine series ranges is 36" (914mm)

Operating Pressure		Installation Clearances		Total Input
Natural	Propane	Sides	Rear	40,000 BTU/HR (11.7Kw)
6"WC (15mbar)	10"WC (25mbar)	6"(152mm)	6"(152mm)	

Garland/US Range reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8097
09/24

WELBILT
an Ali Group Company