



# BEVERAGE-AIR

|                 |            |
|-----------------|------------|
| Project: _____  | AIA# _____ |
| Item: _____     |            |
| Location: _____ | SIS# _____ |
| Approved: _____ |            |

PR3HC TOP MOUNT REFRIGERATOR

## P-SERIES TOP MOUNT REFRIGERATOR

PR3HC Solid Door Reach-In  
Hydrocarbon Series

MODEL:  
PR3HC-1AS



**3 Year Parts/Labor Warranty**  
**Additional 4 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- Interior is made of corrosion resistant aluminum
- Stainless steel door liner
- Full electronic control
- Expansion valve technology
- Variable speed compressor technology
- Self-closing doors with 120° stay-open feature
- 22 Gauge stainless steel door
- LED interior light
- Cylinder locks
- Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- Energy saving thermal breaker
- Stainless steel breaker caps
- Nine (9) heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- 8' Cord and plug (see electrical data for details)

### OPTIONS & ACCESSORIES

- Stainless steel case back
- Stainless steel interior
- Additional shelves
- 3" or 6" Casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- Door swing orientation (at time of order)
- Remote option (see note back on page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com



# BEVERAGE-AIR®


| MODEL                            | PR3HC-1AS     |
|----------------------------------|---------------|
| <b>EXTERNAL DIMENSIONAL DATA</b> |               |
| Width Overall                    | 77 ¾"         |
| Depth Overall with Handles       | 34 ¾"         |
| Height Overall                   | 84 ½"         |
| No. of Doors                     | 3             |
| Depth with Door Open 90°         | 57 ¾"         |
| Door Openings                    | 21 ½" x 54 ⅝" |
| <b>INTERNAL DIMENSIONAL DATA</b> |               |
| NET Capacity (cubic ft.)         | 68.34         |
| Internal Width Overall (in)      | 73 ¾"         |
| Internal Depth Overall (in)      | 26"           |
| Internal Height Overall (in)     | 56 ⅝"         |
| No. of Shelves                   | 9             |
| <b>ELECTRICAL DATA</b>           |               |
| Full Load Amperes 115/60/1**     | 8.5           |
| <b>REFRIGERATION DATA</b>        |               |
| Horsepower                       | 3/4           |
| Capacity (BTU/Hr)                | 4950          |
| Heat Rejection (BTU/Hr)          | 7425          |
| Charge (lbs/grams)               | 0.2866/130    |
| <b>SHIPPING DATA</b>             |               |
| Gross Weight - Crated            | 791 lbs       |
| Height - Crated                  | 88"           |
| Width - Crated                   | 87"           |
| Depth - Crated                   | 45"           |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.


## P-Series Top Mount Refrigerator Model: PR3HC-1AS

### Model Views


12" Top and 3" side and rear clearance is required

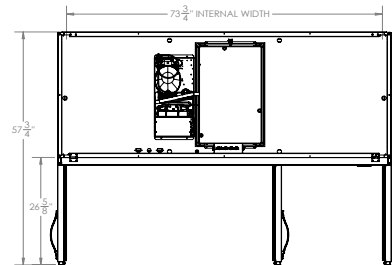

### PLAN VIEW



### ELEVATION VIEW

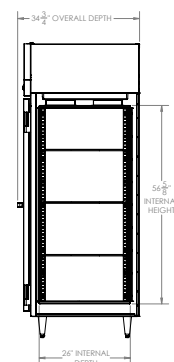

### SIDE VIEW

## ELECTRICAL CONNECTION



115/60/1\*\*  
NEMA 5-15P

Unit pre-wired at  
factory and include  
8' long cord and plug  
set.

\*\* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company



The Spirit of Excellence