



KMS-1122MLJ

SERENITY SERIES CUBER ICE MACHINE



KMS-1122MLJ
07/02/24
Item # 13253

Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 1151 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- EverCheck™ alert system 
- No heat, less noise
- CFC / HFC Free Foam
- R-404A Refrigerant
- Not recommended for side-by-side application

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

W x D x H
22" x 18^{1/8}" x 31^{1/4}"

Shipping Dimensions
30^{1/2}" x 30" x 37"

Installation Dimension*
SRK-12J / SRK-12J3
52^{3/8}" x 19^{1/2}" x 43"

*Dimensions include legs

Actual Dimension
SRK-12J / SRK-12J3
50^{1/4}" x 17" x 28"

KM|EDGE™

KMS-1122MLJ
Remote Air-Cooled
Shown on optional
Lancer 30" Dispenser



		ICE PRODUCTION		WATER USAGE		ELECTRICAL					
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Voltage	Circuit Wires (including ground)	Refrigerant Charge Amount	Net / Ship Weight (lbs.)	
	Remote	KMS-1122MLJ with SRK-12J	1151	1075	16.0	N/A	4.2	115V/60/1*	4‡	7.1 oz.	122 /152
	Remote	KMS-1122MLJ with SRK-12J3	1151	1100	16.0	N/A	4.05	115V/60/3*	4	7.1 oz.	122 /152


* Voltage supply for KMS Ice Maker is supplied from the SRK Remote Condenser

Condenser	Model	LINE SETS - Brazing Required			TEMP RANGE		ELECTRICAL					Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		25' Length	35' Length	55' Length	Ambient (Outdoor Use)	Voltage Range	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.		
Remote	SRK-12J	HS-0250†	HS-0251†	HS-0252†	-20 - 122°	187-253VAC	20A	11.6A	208-230V/60/1	4‡	16,500	15 lb. 14 oz.	230 /275
Remote	SRK-12J3	HS-0250†	HS-0251†	HS-0252†	-20 - 122°	187-253VAC	20A	10.5A	208-230V/60/3	4	17,300	15 lb. 14 oz.	230 /275

† Line sets require refrigerant. ‡ If neutral is not available transformer kit (HS-5030) is required. Refer to instruction manual for installation and electrical requirements. See instruction manual for wiring diagram.

Power cord not included. Must be hard-wired at site.

KMEdge™ Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits- KMS-1122MLJ

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187-253V‡
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

‡ Voltage supply for KMS Ice Maker is supplied from the SRK Remote Condenser

Service- KMS-1122MLJ

- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance and/or service should they be required.
- Panels easily removed and all components accessible for service.

Plumbing- KMS-1122MLJ

- Ice maker Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Service- SRK-12J(3)

- Allow 24" (61 cm) clearance in both front and rear for proper air circulation and ease of maintenance/service.
- For best performance the Remote Condenser should not be more than 33 feet above the icemaker or no more than 10 feet below it. These distances are measure from fitting to fitting.

Hoshizaki reserves the right to change specifications without notice.




KMS-1122MLJ

SERENITY SERIES CUBER ICE MACHINE




KMS-1122MLJ
07/02/24
Item # 13253

FRONT VIEW

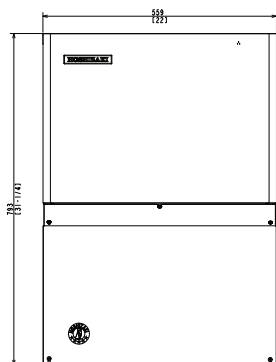


REMOTE AIR-COOLED

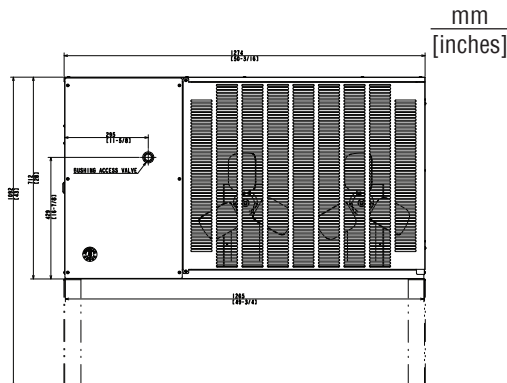


SRK-12J(3) REMOTE CONDENSER

SIDE VIEW

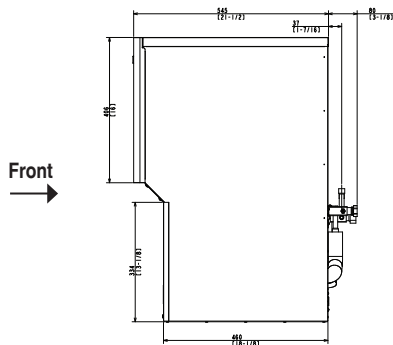


REMOTE AIR-COOLED

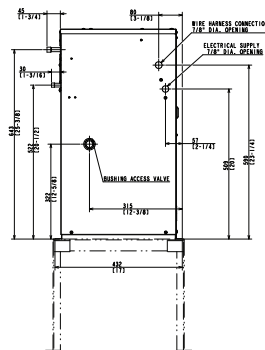


SRK-12J(3) REMOTE CONDENSER

REAR VIEW

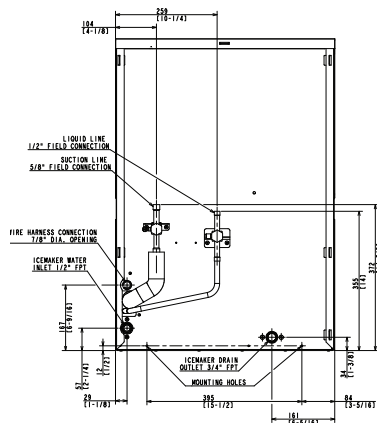


REMOTE AIR-COOLED

TOP VIEW

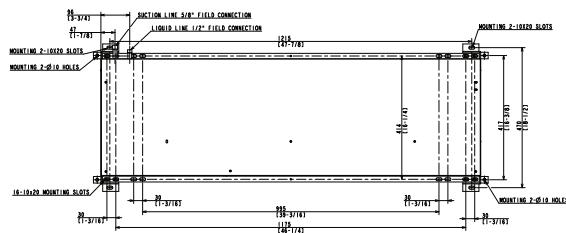

SRK-12J(3) REMOTE CONDENSER

BOTTOM VIEW



REMOTE AIR-COOLED

SRK-12J(3) Remote Condenser (Sold Separately)
(W x D x H) 52 3/8 x 19 1/2 x 43
For Use with KMS-1122MLJ

Brazed Line Sets
(Sold Separately)
25' HS-0250
35' HS-0251
55' HS-0252

Voltage supply for the KMS Ice
Maker is supplied from the SRK
Remote Condenser.

